

# PFM820

## UTC Controller



## Features

- Support different formats (HDCVI/AHD/HDTVI/CVBS) switch, which is to satisfy the requirements of different storage device environments for clients;
- Various format indicator lights, which makes it convenient for users to check the current format status and prompt if the format switch is successful;
- Support OSD control and the electric zoom function control in CVBS mode.


### Technical Specifications

<b>Model</b>	<b>PFM820</b>
<b>Features</b>	
Formats	HDCVI/AHD/HDTVI/CVBS
Power Consumption	0.3W
Power Supply	AAA battery*2
Indicator Lights	Prompt current format
Applicable Pixel	2MP and below
<b>Physical Properties</b>	
Dimension(LxWxH)	Body: 90mmx41mmx21mm (3.54"x1.61"x0.83") Length: 560mm(22.05")
Outer Shell	PC&ABS
Color	White
N.W.	48g(0.11lb)
<b>Environmental</b>	
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Humidity	0~95% (non-condensing)
<b>Certification</b>	
Certification	CE


### Order Information

Type	Part Number	Description
HDCVI Accessories	PFM820	UTC controller

### Dimensions (mm/inch)

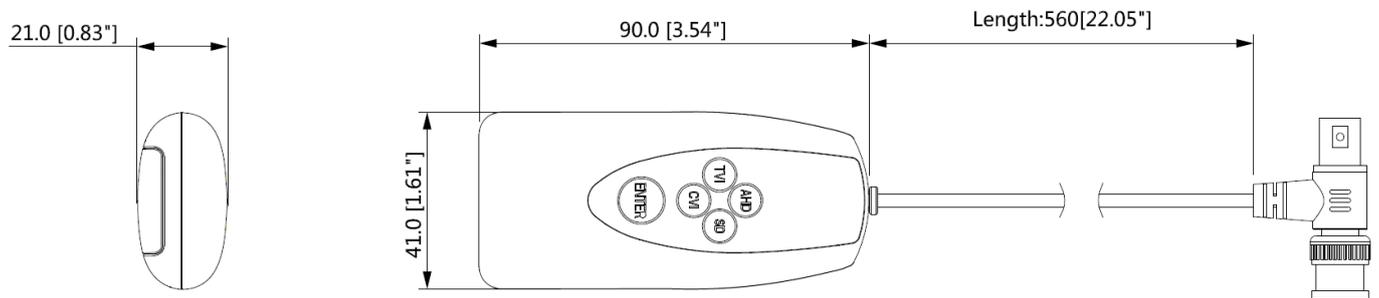

## Application

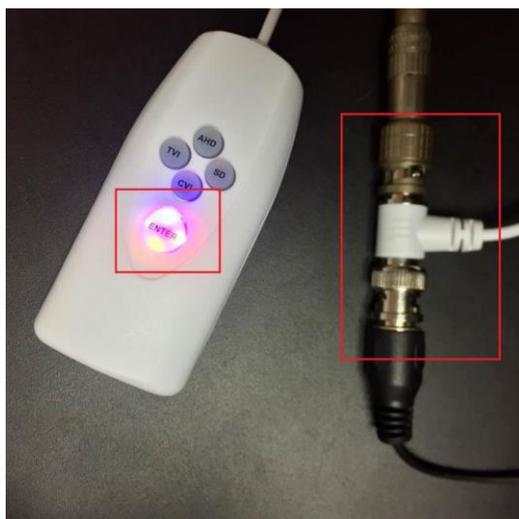

## Package Information

- UTC controller \*1
- Application manual \*1

